


Quam BB2

The BB2 is a complete, beam mount loudspeaker system consisting of an 8" O.D., dual cone loudspeaker with a 10 oz. magnet and a 5W, 25/70V transformer. Components are mounted on a round, studded baffle that is attached to a steel backbox with two (2) beam clamps for a secure, permanent installation. The BB2 has a white, powder coat finish and is shipped as a fully assembled unit.



APPLICATION	Intended Use:	Indoor environment
	Program Material:	Signal tones, voice and music
	Installation:	Downward firing on a steel "I" beam of 5.25" maximum width
AUDIO PERFORMANCE	Average Sensitivity:	95dB SPL, 1W/1M
	Loudspeaker Power Rating:	102dB SPL, 5W/1M
	Calculated Output:	20W RMS, EIA 426A Standard
	Magnet Type & Weight:	BeFe Ceramic, 10 oz. Nominal
	Frequency Response:	65Hz - 17kHz EIA, 426A Standard
	Nominal Coverage Angle:	90° Included Angle, -6dB/2kHz, Half Space
	Audio Connection:	7", Color-coded, Pre-tinned Leads
COMPONENT	Dimensions:	12 5/16" (DIA) x 4 5/16" (H)
	Weight:	7.0 lbs.
	Loudspeaker:	8C10PAX
	Transformer:	TBLU: 5W, 25/70V, with 5 taps (0.31W, 0.63W, 1.25W, 2.5W, 5.0W)
	Finish	White powder coat
	Other:	Two (2) beam clamps

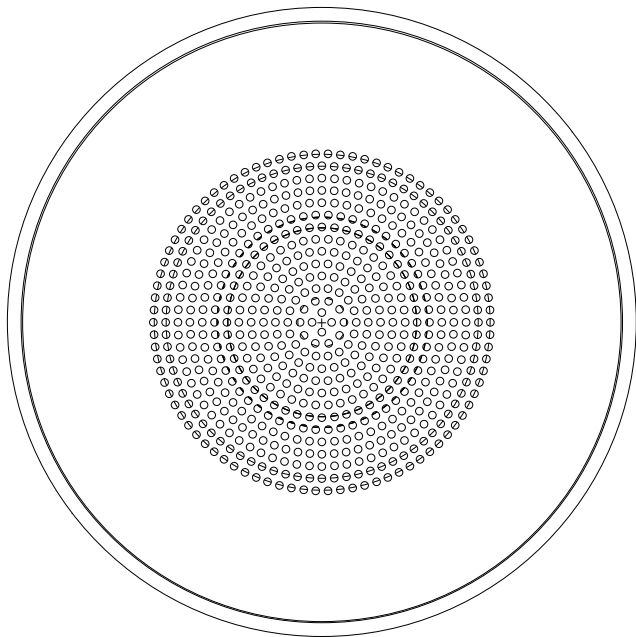

12 5/16" DIA

