

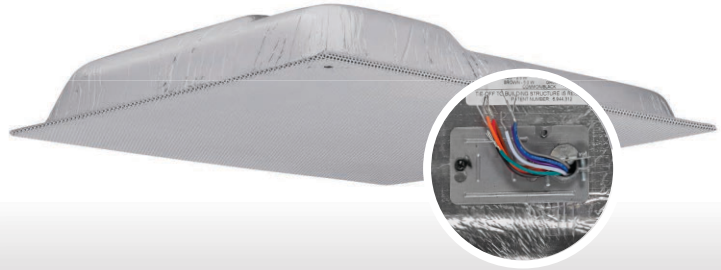


Quam SYSTEM 12/VC

SYSTEM 12/VC is a complete, shallow depth, lightweight, 2' x 2' ceiling tile replacement loudspeaker system consisting of an 8" O.D. loudspeaker with a 5 oz. magnet and a 5W, 25/70V transformer with screwdriver adjusted volume control. Molded fiber enclosure is 1,283 CID. The SYSTEM 12/VC has a powder coated steel baffle with standard perforation and four (4) seismic tie-off points. The cable clamp is included. No assembly required.



APPLICATION	Intended Use: Program Material: Installation:	Indoor environment Signal tones, voice, and music Mounted parallel to floor plane in a 24" wide suspended ceiling grid
AUDIO PERFORMANCE	Average Sensitivity: Loudspeaker Power Rating: Maximum Power Rating: Calculated Output: Magnet Type & Weight: Frequency Response: Nominal Coverage Angle: Audio Connection:	92dB SPL, 1W/1M 12W RMS, EIA 426A Standard 15W @ 8 Ohms 99dB SPL, 5W/1M BeFe Ceramic, 5 oz. Nominal 65Hz - 17kHz, EIA 426A Standard 100° Included Angle, -6dB/2kHz, Half Space 3 1/2", Color-coded, Pre-tinned Leads
COMPONENT	Dimension: Weight: Loudspeaker Model: Loudspeaker Specs: Transformer: Integral Enclosure: Grille: Finish:	3 1/2" (H) x 23 13/16" (W) x 23 13/16" (D) 6.20 lbs. 8C5PAX 8" O.D. loudspeaker, 5 oz. magnet TBLU; 5W, 25/70V, with 5 taps (0.31W, 0.63W, 1.25W, 2.5W, 5W) 1,283 CID molded fiber Standard perforated steel with four (4) seismic tie-off points White powder coat finish

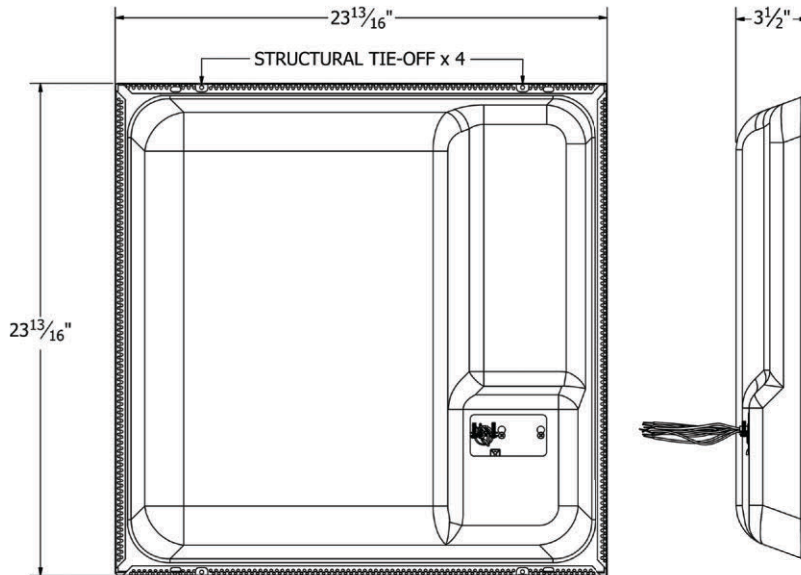

Standard Perforation Pattern
Shown as 1" Square Sample