


The SYSTEM 6VP is a complete, vandal resistant horn assembly featuring a double re-entrant, compression horn with an integrated 16W, 25/70V, multi-tap transformer that is mounted on a vandal resistant baffle. It also includes a square, heavy gauge steel, surface mount enclosure with four (4) threaded inserts for baffle attachment, a single ½" conduit entrance and a Wiremold entrance on the top and bottom. Tamper resistant, 8-32 x 1", 'pin-in-torx' screws are included. It has a high durability, white, powder coat finish.



APPLICATION	Intended Use: Program Material: Installation:	Indoor or protected outdoor environment Signal tones, voice, and music Vertical or horizontal surface mount
AUDIO	Average Sensitivity:	110dB SPL, 1W/1M
PERFORMANCE	Loudspeaker Power Rating:	16W RMS, EIA 426A Standard
	Calculated Output:	121dB SPL, 16W/1M
	Magnet Type & Weight:	BeFe Ceramic, 5 oz. Nominal
	Frequency Response:	350Hz - 10kHz, EIA 426A Standard
	Nominal Coverage Angle:	90° Included Angle, -6dB/2kHz, Half Space
	Audio Connection:	7", Color-coded, Pre-tinned Leads
COMPONENT	Dimensions:	$115_{8}^{"}$ (H) x $115_{8}^{"}$ (W) x $4\frac{1}{8}^{"}$ (D)
	Weight:	12 lbs.
	Loudspeaker Model:	H16
	Loudspeaker Specs:	Double re-entrant horn
	Transformer:	16W, 25/70V, with 5 taps (1W, 2W, 4W, 8W, 16W)
	Baffle:	BS8VP: square
	Enclosure:	SE1WVP
	Finish:	White powder coat finish
	Other:	Tamper resistant, 8-32x1" 'pin-in-torx' hardware included

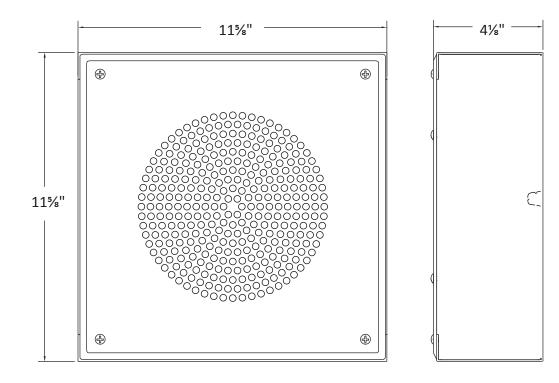

Quam Nichols Company | 234 East Marquette Road | Chicago, IL. 60637 | t: 800-633-3669 | f: 888-633-3669 | e: NeedNow@QNC.com | QuamSpeakers.com ©2020 Quam Nichols Company reserves the right to make changes and/or improvements to its products at any time and without notice. | v2018

