INTERCOM LOUDSPEAKER





The CIS8/45 is a 2-gang, vandal resistant, hands free intercom station with a 2.5", square frame, 45 Ohm loudspeaker that has a 2.35 oz. ceramic magnet and a moisture resistant cone. With a tamper resistant, heavy gauge, stainless steel faceplate and three (3) interwoven steel screens to protect the speaker, the CIS8/45 provides a very durable, high security call station for the most challenging applications. Tamper resistant, #6-32 x 1", 'pin-in-torx' screws are included.



APPLICATION	Intended Use:	Indoor or protected outdoor environment
	Program Material:	Signal tones and voice
	Mounting:	2-gang electrical box
AUDIO	Average Sensitivity:	87dB SPL, 1W/ 1M
PERFORMANCE	Loudspeaker Power Rating:	4W RMS, EIA 426A Standard
	Maximum Power Rating:	5W @ 45 Ohms
	Calculated Output:	93dB SPL, 5W/ 1M
	Magnet Type & Weight:	BeFe Ceramic, 2.35 oz. Nominal
	Frequency Response:	200Hz - 6kHz, EIA 426A Standard
	Nominal Coverage Angle:	90° Included Angle, -6dB/2kHz, Half Space
	Audio Connection:	0.205" Spade Lugs
COMPONENT	Dimension:	4 ½" (H) x 4 ½" (W) x 1 ¾" (D)
	Weight:	3 lbs.
	Loudspeaker Model:	25C25Z45OT
	Loudspeaker Specs:	2.5" square frame, moisture resistant loudspeaker
	Finish:	Brushed
	Material:	12 gauge, stainless steel faceplate
	Other:	Three (3) interwoven, steel screens mounted between faceplate and loudspeaker,
		four (4), tamper resistant, #6-32 x 1", 'pin-in-torx' screws are included

RECOMMENDED Enclosures: QUAM COMPONENTS Custom Engraving & Fill: Surface Mount — SE6GVP, SE7GVP Contact the factory for details and lead times

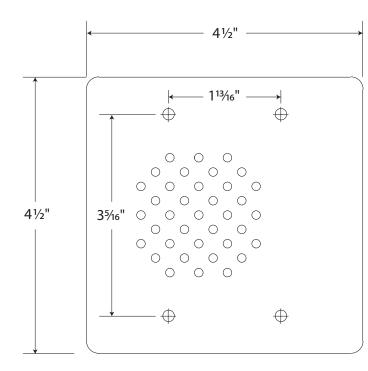

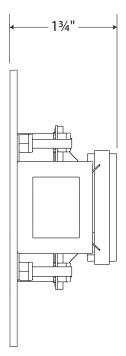

Quam Nichols Company | 234 East Marquette Road | Chicago, IL. 60637 | t: 800-633-3669 | f: 888-633-3669 | e: NeedNow@QNC.com | QuamSpeakers.com @2020 Quam Nichols Company reserves the right to make changes and/or improvements to its products at any time and without notice. | v.2018

